








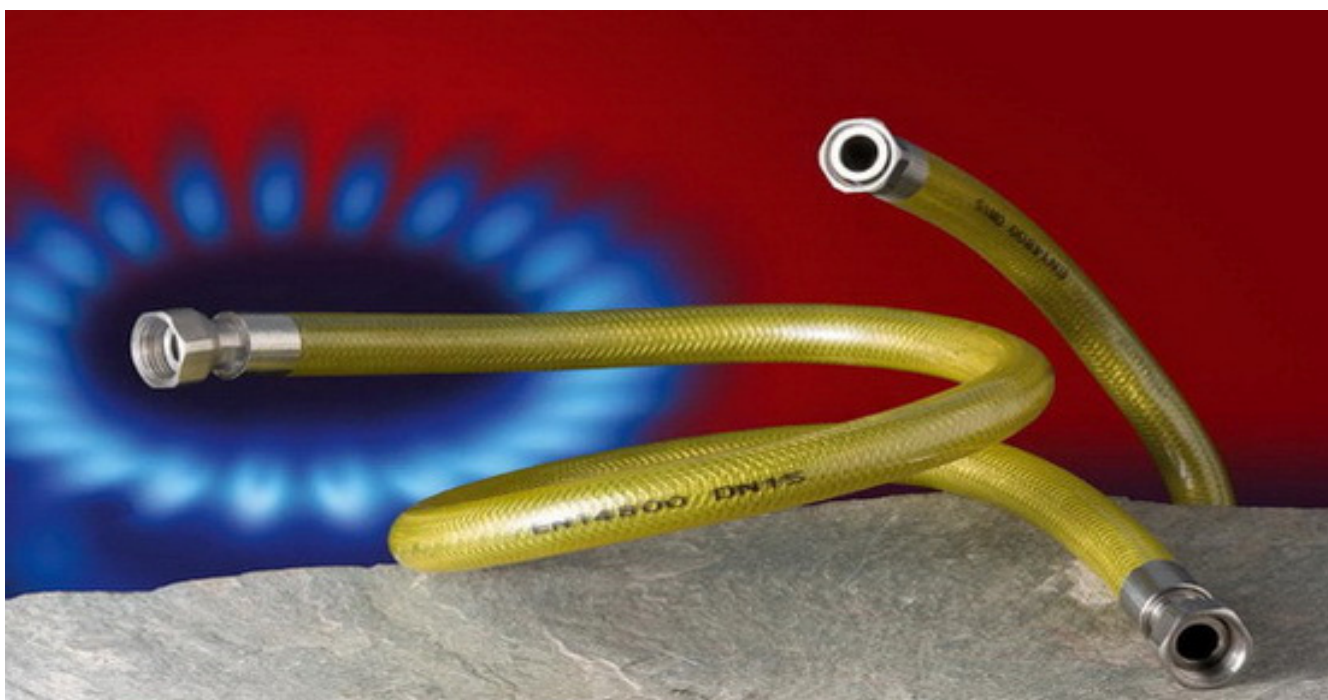


METALLVOOLIKUD GAASILE SUPERGAS norm EN 14800



DN	 AISI 316L	 Kaetud	 Otsikud	 Joode	 R= mm	 bar	 °C	 Pakendis
	Voolik				Painde- raadius	Töörõhk	Ruumi- temperatuur	



Supergas by Parigi®										
1/2"	mm 12	PVC	INOX	T.I.G.	23	0,5	-5 + 60	1		
Tüüp					500	750	1000	1250	1500	2000
F-F										
	F1/2" - F1/2"				•					
	F1/2" - F1/2"					•				
	F1/2" - F1/2"						•			
	F1/2" - F1/2"							•		
	F1/2" - F1/2"								•	
	F1/2" - F1/2"									•
M-F										
	M1/2" - F1/2"				•					
	M1/2" - F1/2"					•				
	M1/2" - F1/2"						•			
	M1/2" - F1/2"							•		
	M1/2" - F1/2"								•	
	M1/2" - F1/2"									•

	PIKKUS	KOOD	HIND	HIND + 20%
F1/2"-F1/2"	500mm	64205	14,500	17,40
	750mm	64207	16,667	20,00
	1000mm	64210	17,167	20,60
	1250mm	64212	20,958	25,15
	1500mm	64215	21,375	25,65
	2000mm	64220	24,042	28,85
M1/2"-F1/2"	500mm	64305	14,500	17,40
	750mm	64307	16,667	20,00
	1000mm	64310	17,167	20,60
	1250mm	64312	20,985	25,15
	1500mm	64315	21,375	25,65
	2000mm	64320	24,042	28,85

GARANTII
5
AASTAT